


Mount the top part of the canopy on the ceiling. Connect the blue and brown cables of the **24Vdc** driver to the power supply and the black and red cables to the steel cables, **Vo+ red/red**

Vo - black/black.

and close the canopy with the 4 screws.

or connect the power supply and fix the roset.


1

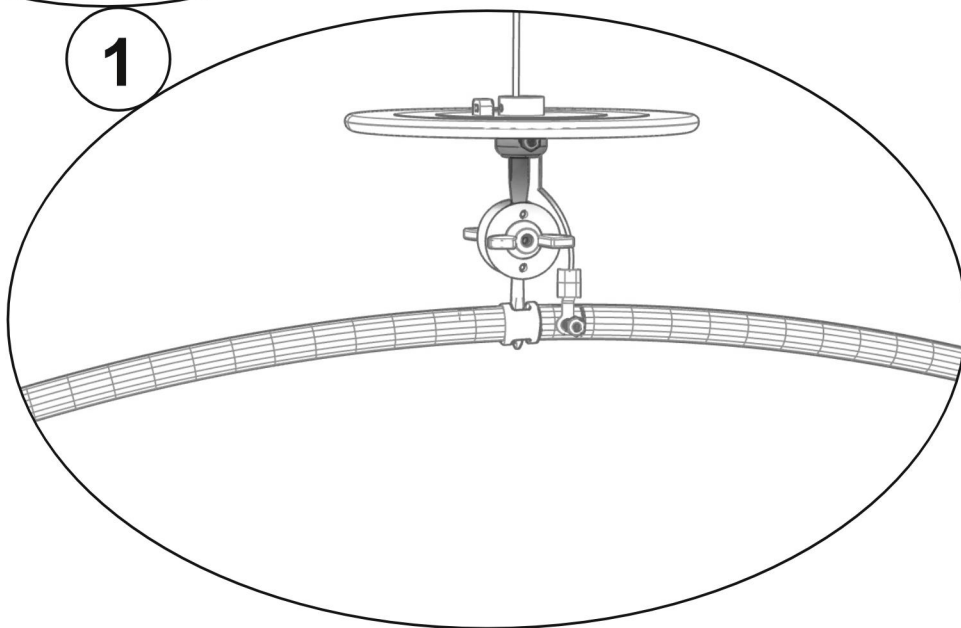


2

Connect the tubes with the hinge, close the hinge and connect the cables to the tubes with the small nuts.

The **-** pole is on the tubes
the **+** pole inside.

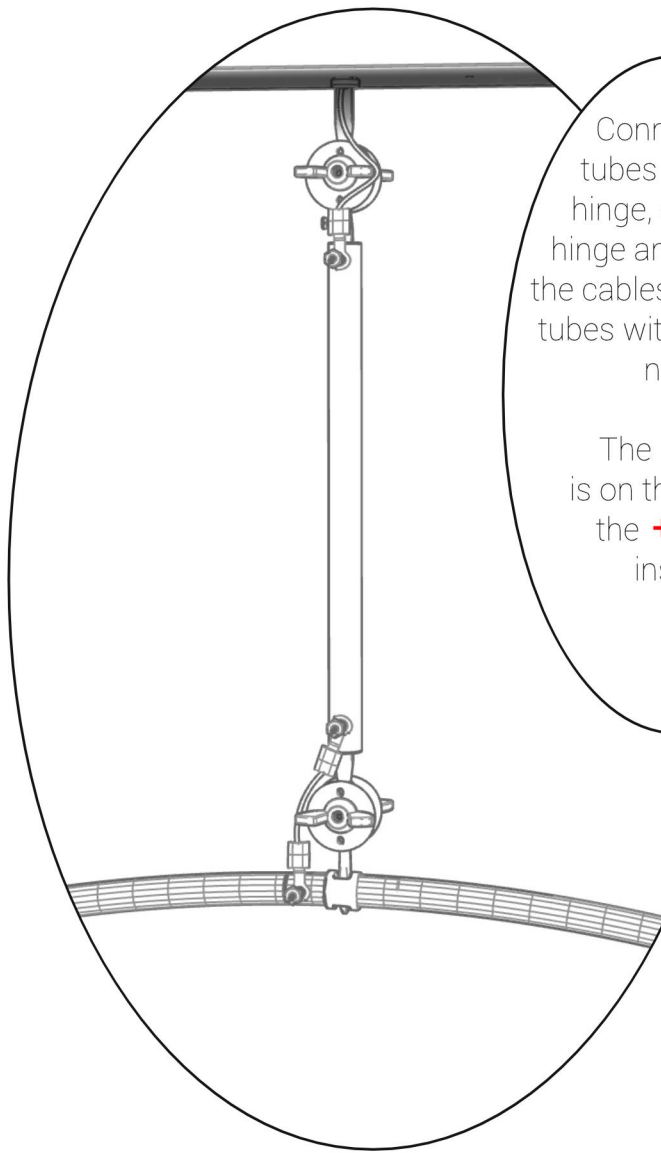


3

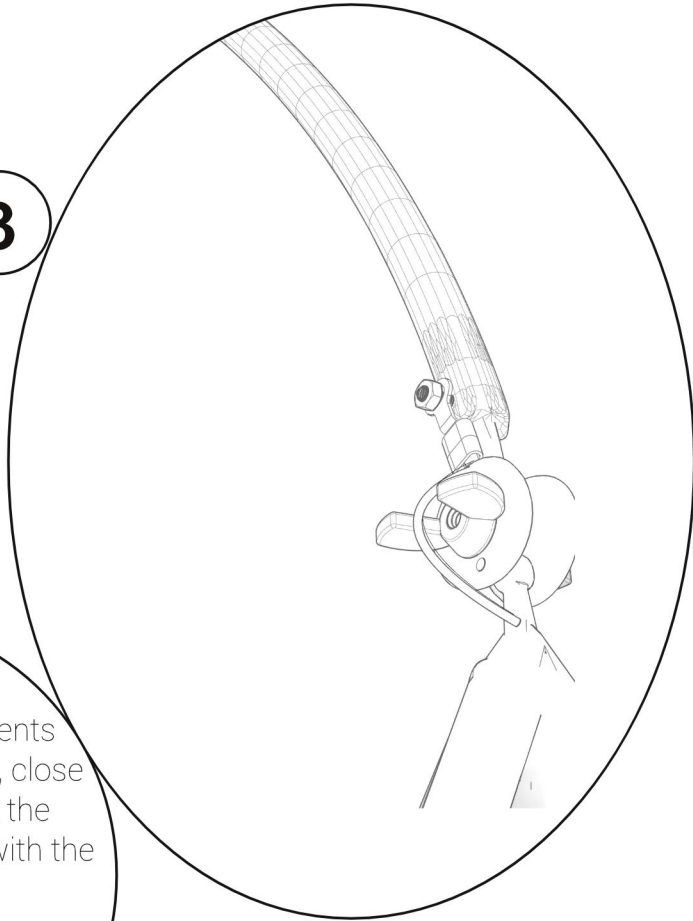

Connect the light elements and tubes with the hinge, close the hinge and connect the cables to the tubes with the small nuts.

The - pole is on the tubes the + pole inside.

Position the
light elements and tighten
the screws as hard as possible
with 2 wrenches.

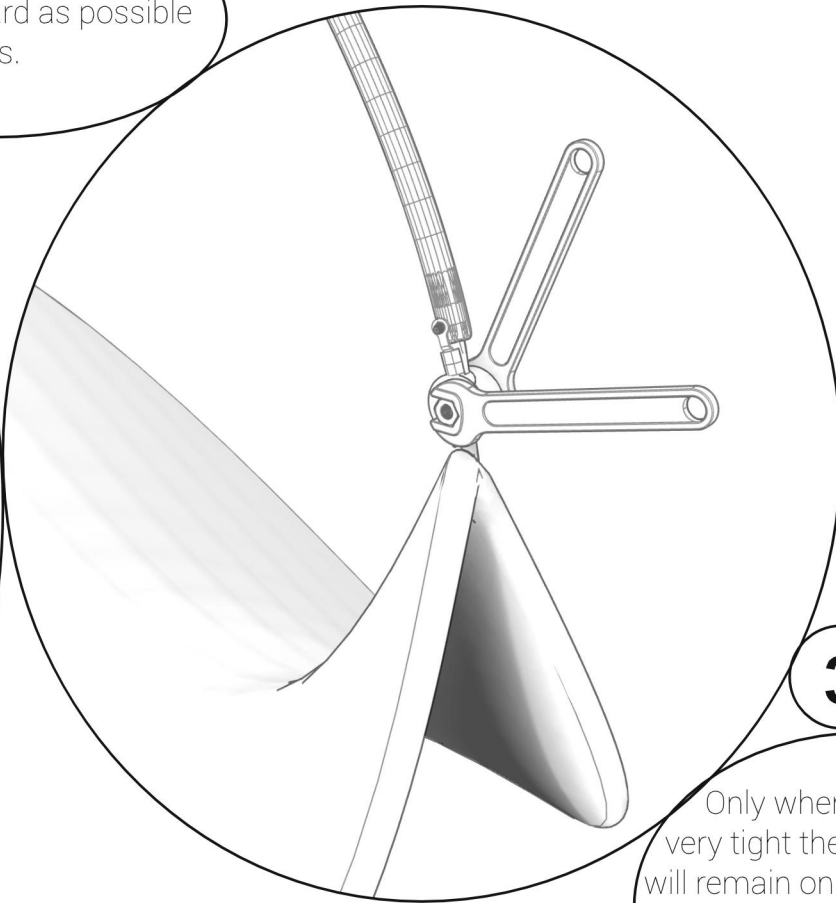

3

Only when fastened
very tight the light element
will remain on its place.

connect the cables
shoe to the
tube.




4 elements and 3
arches


Connect the first arch first, on both
ends connect the other 2 arches and
on the 4 ends the 4 light elements with
the hinges.

Connect the cables to the tubes with
the small nut

The - pole
is on the tubes the
+ pole inside.

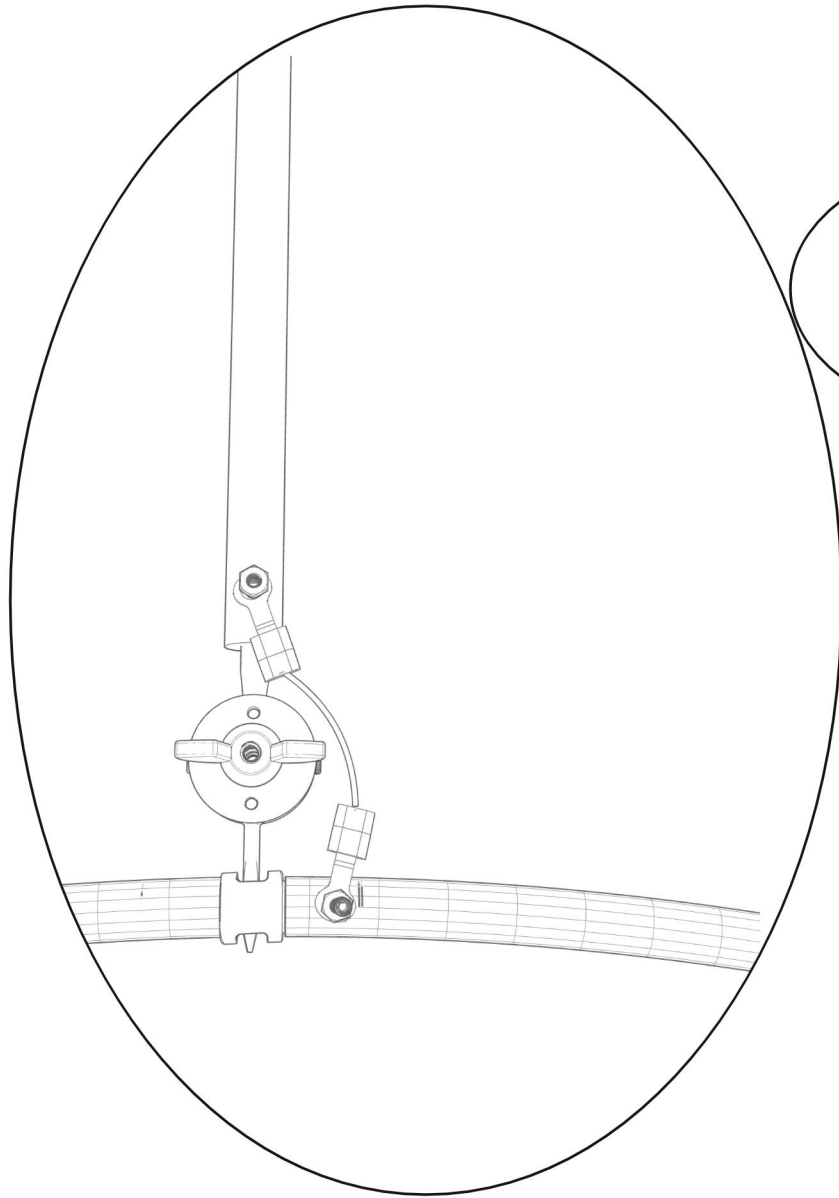

The - pole
is on the tubes the
+ pole inside.

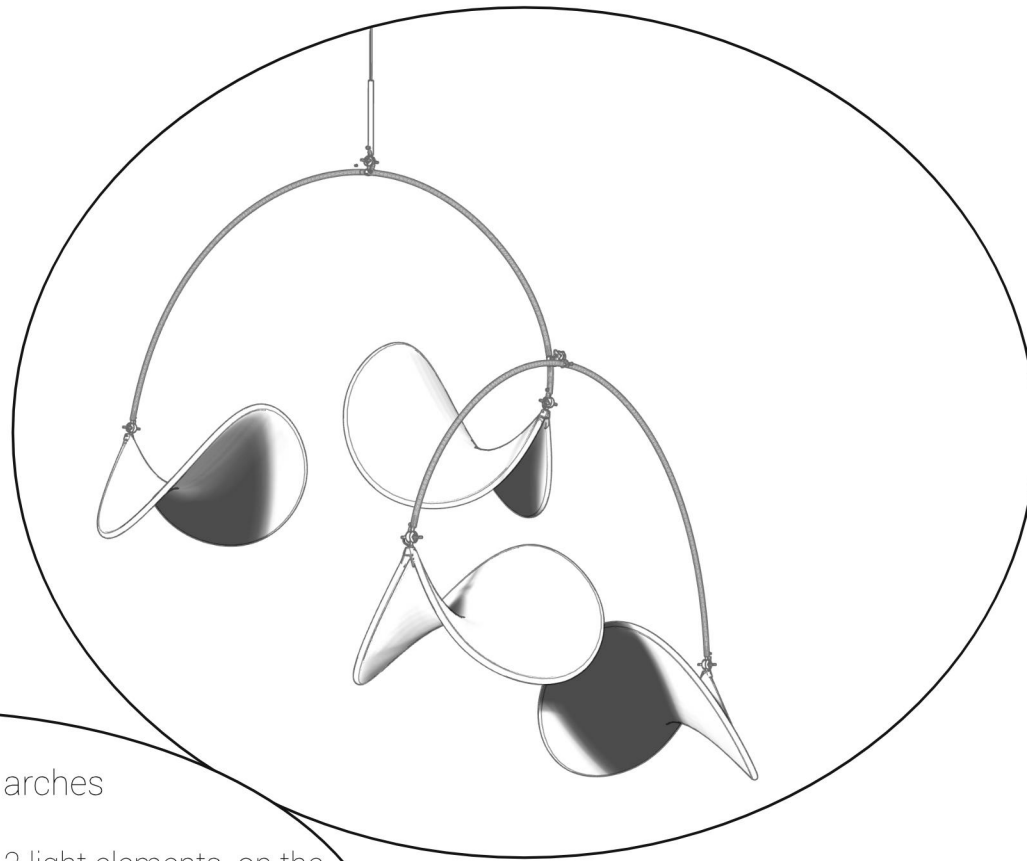

4 elements and 2 arches

Connect the first arch first, connect 2 light elements on the 2 ends and the second arch slightly above one light element.
Then connect the 2 remaining light elements.
Connect the cable shoes to the tubes with the small nut

The $-$ pole
is on the tubes the
 $+$ pole inside.

