LASVIT Technical Sheet DUNA COLLECTION

DESIGNER: Zaha Hadid YEAR OF DESIGN: 2017 Glass: Hand blown glass

Its design concept is realized in a three dimensional, asymmetrical, pair of intersecting glass forms. The striated surface of the crystal glass produces ever-changing effects of reflection and refraction. Narrowly directed light sources beam light through the mass of glass into the entire glass element, highlighting its geometry.



PACKAGING

Duna

Size: 775 × 350 × 280 cm Pallet: 12 pcs Total weight: 18 kg Duna wallsconce

Size: 280 × 200 × 780 cm Pallet: 20 pcs Total weight: 13 kg

LASVIT Technical Sheet

DUNA COLLECTION

TECHNICAL DETAILS DUNA PENDANT

Туре	CE	UL			
Light source	2 × LED module, 10W, 3000K				
	Lm 1575				
	CRI 80				
	nable				
Input voltage	220 – 240 VAC/50 – 60Hz	120VAC/60Hz			
Cord lenght	2000mm/78¾", longer cord is available, contact your sales person				
Cord color	transparent cabel, 2 stainless steel wire				
Rated power	20W				
Ballast	trailing edge				
Primary material	transparent anodized aluminium alloy				
Prot. rating	IP 20				
Safety class	CLASS I				


LASVIT Technical Sheet

DUNA COLLECTION

TECHNICAL DETAILS DUNA WALLSCONCE

CE	UL			
LED module, 10W, 3000K 1575 Lummens CRI 80				
220 – 240VAC/50 – 60Hz	120VAC/60Hz			
10W				
trailing edge no dimmable				
transparent anodized aluminium alloy				
IP 20				
CLASS I				
	LED module 1575 Lu CR 220 – 240VAC/50 – 60Hz 10 trailing edge transparent anodia			

LASVIT Technical Sheet DUNA COLLECTION TECHNICAL DRAWING

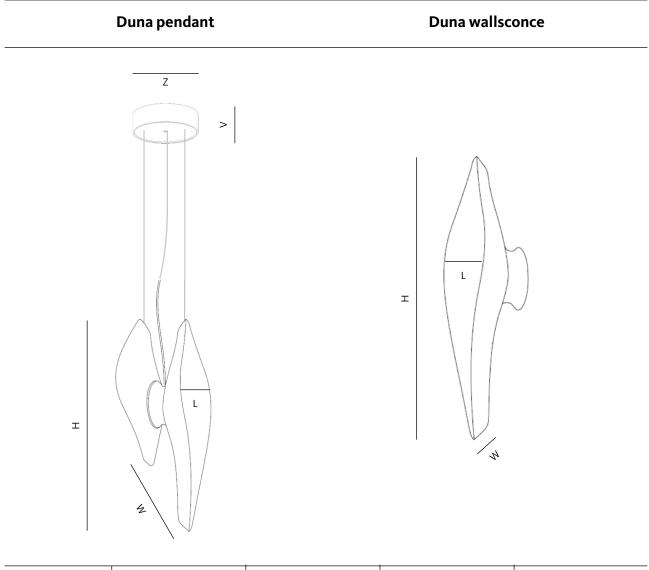

Name	W / L (mm/inch)	H / OH (mm/inch)	Z (mm/inch)	V (mm/inch)
Duna pendant	W 260/10¼" × L 205/8¼6"	H 625/24⁵⁄₃" + L	204/8"	50/2"
Duna wallsconce	W 155/6½" × L 205/8¼6"	H 600/23⁵⁄ଃ"	_	_

LASVIT Technical Sheet

Name	Glass color	Item ID – CE	ltem ID – UL	Weight (approx.)
Duna pendant	clear	CL038PA- 4CE00-0129S1	CL038PA- 4UL00-0129S1	15kg/33lbs
Duna wallsconce	clear	CL038WA- 4CE00-0129S1	CL038WA- 4UL00-0129S1	5kg/11lbs

EACH LASVIT COLLECTION IS UNIQUE BECAUSE IT IS COMPLETELY HANDCRAFTED. TINY BUBBLES AND OTHER IRREGULARITIES MAY OCCUR DUE TO THE NATURE OF THE HIGH QUALITY GLASS-BLOWING TECHNIQUE