

PLUS

Design by X. Claramunt and M. de Mas.

VIBIA
LIGHT IS CREATION

Reference

0635.

Application

Outdoor lamps

Installation type

Semi built-in

Description

Semi-recessed ceiling light, designed by X. Claramunt and M. de Mas. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight. Features dimmable electronic ballast (DALI System).

Diffuser


Acrylic diffuser

Finish



0635-03.
Matt white
lacquer

Sketch



Electrical characteristics

1 x 2GX13 230V 55W (T5C)



Total 55 W



Physical characteristics

1 Box / 0.35 x 0.49 x 0.49 m. / Vol. 0.0840 m³ /
Gross weight 3.9 kg. / Net weight 3.1 kg.

Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 25.58%
Coordinate system : C-G
Total flux : 4200.00 lm
Maximum value : 86.44 cd/klm
Light position : C=0.00 G=0.00
Double symmetrical : 3

Isolux : Isolux (Suelo)
Light position :
X=0.00m Y=0.00m Z=3.00m
Light rotation :

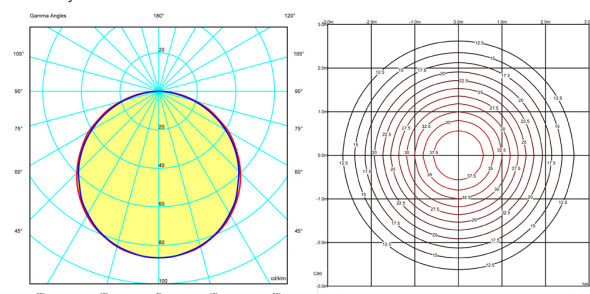

Certificates



GRUPO T DIFFUSION, S.A. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
grupo-t@grupo-t.com www.vibia.com