

LOOP

Design by Culdesac.

VIBIA
LIGHT IS CREATION

Reference

7705.

Application

Wall Lamps

Installation type

Surface

Description

Wall light designed by Culdesac. Its natural shapes make it possible to create different compositions using the effect of the shadows they cast. White lacquer finish. LED light source.

Diffuser


Aluminium diffuser

Finish



7705-03.
White lacquer

Sketch




Electrical characteristics

2 x LED 2W 500mA



Total 4 W

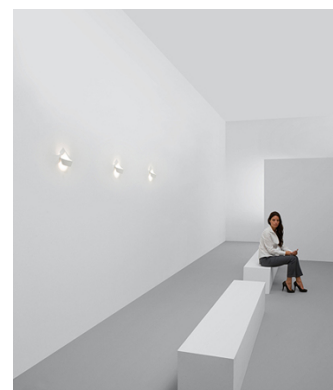

Physical characteristics

1 Box / 0.21 x 0.20 x 0.13 m. / Vol. 0.0054 m³ /
Gross weight 0.6 kg. / Net weight 0.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Orientation


Lamp having a beam powerful enough to define profiles and the surrounding architecture.



Photometric data

Efficiency : 100.00%
Coordinate system : C-G
Total flux : 72.00 lm
Maximum value : 348.61 cd/klm
Light position : C=330.00 G=140.00
Double symmetrical : 4

Isolux : Isolux (Suelo)
Light position :
X=0.00m Y=0.00m Z=3.00m
Light rotation :

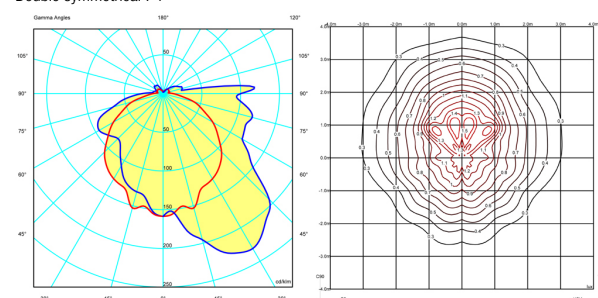

Certificates



GRUPO T DIFFUSION, S.A. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
grupo-t@grupo-t.com www.vibia.com