

COMBI

Design by Proli Diffusion Studio.

VIBIA
LIGHT IS CREATION

Reference

8733.

Application

Wall Lamps

Installation type

Surface

Description

Wall lamp with switch available in chrome finish and with a diffuser in aluminium-weft.

Diffuser

Aluminium-weft diffuser


Finish



8733-01.
Chrome

8733-30.
Matt nickel

Sketch



Electrical characteristics

1 x COMPACT FLUORESCENT GX24q-2 230V 18W



Total 18 W



Physical characteristics

1 Box / 0.43 x 0.29 x 0.15 m. / Vol. 0.0180 m³ /
Gross weight 1.3 kg. / Net weight 0.8 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 82.27%
Coordinate system : C-G
Total flux : 1200.00 lm
Maximum value : 185.33 cd/klm
Light position : C=285.00 G=155.00
Double symmetrical : 4

Isolux : Isolux (Suelo)
Light position :
X=0.00m Y=0.00m Z=3.00m
Light rotation :

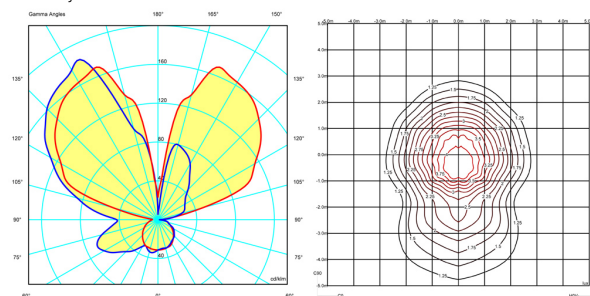

Certificates



GRUPO T DIFFUSION, S.A. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
grupo-t@grupo-t.com www.vibia.com