

CORNER

Design by Oscar & Sergi Devesa.

VIBIA
LIGHT IS CREATION

Reference

8100.

Application

Wall Lamps

Installation type

Surface

Description

Chrome finish wall light designed by Oscar & Sergi Devesa. Borosilicate diffuser and halogen light source.

Diffuser


Borosilicate glass diffuser

Finish



8100-01.
Chrome

Sketch

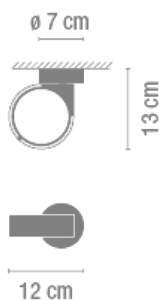

Electrical characteristics

1 x G9 230V 33W Eco



Total 33 W



Physical characteristics

1 Box / 0.13 x 0.20 x 0.21 m. / Vol. 0.0055 m³ /
Gross weight 0.7 kg. / Net weight 0.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 72.76%

Coordinate system : C-G

Total flux : 420.00 lm

Maximum value : 124.48 cd/klm

Light position : C=0.00 G=5.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

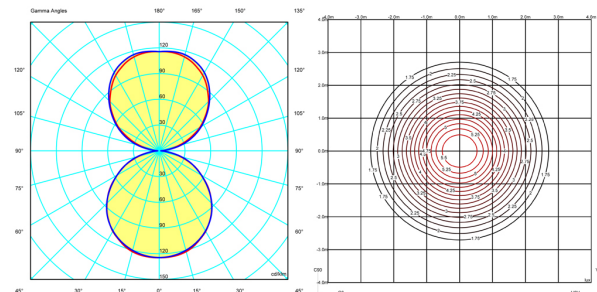

Certificates



GRUPO T DIFFUSION, S.A. Barcelona, 72 - 74. 08820 El Prat de Llobregat (Barcelona - Spain). Tel 934 796 970. Fax 934 796 973.
grupo-t@grupo-t.com www.vibia.com